



# CONTI<sup>®</sup> SYNCHROFORCE CXA

Heavy-duty timing belts for sustained transmission of higher torque levels at low speed

## Properties:

- Temperature range from -20° C to +100 °C, depending on application
- PAH category 2 according to „2014 AfPS GS:01 PAK“
- Electrically conductive in accordance with ISO 9563
- Conditionally resistant to oil
- Ozone-resistant
- Suitable for tropical climates
- Resistant to aging
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free
- Suitable for highest loads
- Increased performance

## Belt structure:

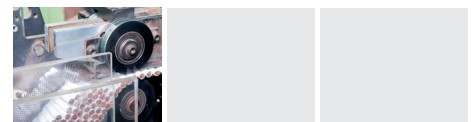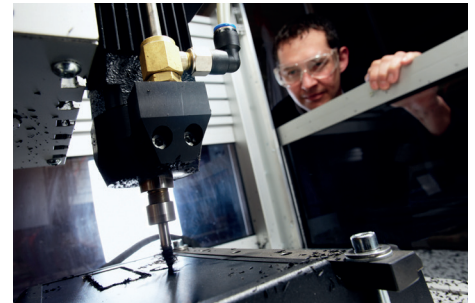

## HTD

Profile	Length range L <sub>p</sub> (mm)
HTD 8M CXA	288 - 3808
HTD 14M CXA	966 - 4578

## STD

Profile	Length range L <sub>p</sub> (mm)
STD S8M CXA	440 - 2848

## CTD

Profile	Length range L <sub>p</sub> (mm)
CTD C8M CXA	228 - 1280

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)